


DFB laser diodes for 1000nm applications

Device protected by US patent no. 6,671,306

datasheet

description

nanoplus 950-1000nm DFB laser diodes (in the following a 980nm device is exemplary presented) show unique device performance to meet the requirements of our customers. Their high side mode suppression ratio (SMSR) and high spectral purity make them perfectly suited for applications like e.g. the use as seed lasers. Mode-hop free DFB emission with a high side mode suppression ratio (SMSR) around 35dB is guaranteed for the device in the entire specified temperature and current range of operation. In addition to QW active material, QD material with unique performance is also available in this wavelength range upon request.

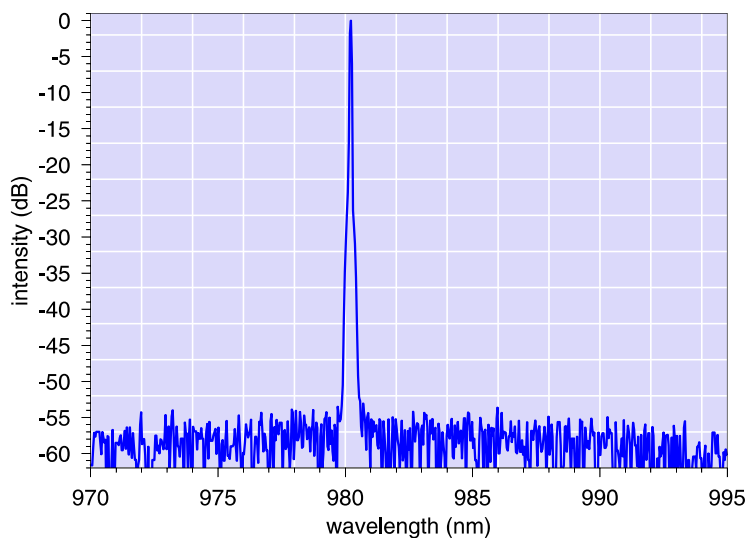

specifications

Parameter	Symbol	Unit	min	typical	max
Wavelength		nm	979	980	981
Side mode suppression		db		35	
Optical output power	P_{opt}	mW		10	
Forward current	I_f	mA	15	25	35
Threshold current	I_{th}	mA	8	12	15
Beam divergence parallel		deg.	25	30	35
Beam divergence perpendicular		deg.	45	50	55
Slope efficiency	e	mW/mA	0.4	0.5	0.6
Current tuning rate	C_I	nm/mA	0.015	0.02	0.022
Temperature tuning rate	C_T	nm/K	0.06	0.07	0.08

nanoplus GmbH
 Nanosystems and Technologies
 Oberer Kirschberg 4
 D-97218 Gerbrunn
 Germany
 phone: +49 931 90827-0
 fax: +49 931 90827-19
 www.nanoplus.com
 sales@nanoplus.com

Device protected by US patent no. 6,671,306

■ absolute maximum ratings

Parameter	Symbol	Unit	Rating
LD forward current	I_f	mA	60
Operating temperature	T_{op}	deg C	-20-50
Storage temperature	T_{store}	deg C	-20-85

■ applications

- seed laser

■ packaging

nanoplus offers a wide variety of different packaging options for their FP and DFB laser diodes in the entire wavelength range, including all standardized TO headers (e.g. TO 5.6 mm, TO 9 mm, TO 8) with or without Peltier cooler. Please refer to our *packaging datasheet* for more information.

Other customized packages (e.g. mounting on customer specific submounts) are available upon request. Please do not hesitate to contact us for further details.



nanoplus GmbH
Nanosystems and Technologies
Oberer Kirschberg 4
D-97218 Gerbrunn
Germany
phone: +49 931 90827-0
fax: +49 931 90827-19
www.nanoplus.com
sales@nanoplus.com